

■ Description

- ✓ Wide Input Voltage: 90~305Vac
- ✓ High Efficiency up to 93.0%
- ✓ APFC (Active Power Factor Correction): 0.99 Typical
- ✓ All-Around Protection: OVP/OTP/SHORT
- ✓ 0-10V/PWM/Resistor/Time 4 in 1 Dimmable
- ✓ Programmable Output Current with Constant Wattage Design
- ✓ Lightning Protection 6kV
- ✓ Waterproof: IP67
- ✓ 100% Full Load Aging Test for 4 Hours @Ta=45°C
- ✓ Safety Design Compliant to UL8750/IEC61347
- ✓ Thermal Optimized Aluminum Case with Potting



■ Application

Outdoor Applications: Street Light and High Bay

■ Model Selection

| Model Number | Input Voltage Range | Output Power | Output Voltage Range | Output Current (Io) | Typical Eff. | Certification |
|---------------------|---------------------|--------------|----------------------|---------------------|--------------|------------------------|
| PF-P250CC-C053-S-xx | 90 ~ 305 Vac | 250 W | 283~472Vdc | 530mA | 93% | CCC CB ENEC CE RoHS |
| PF-P250CC-C053-U-xx | 90 ~ 305 Vac | 250 W | 283~472Vdc | 530mA | 93% | UL FCC CE RoHS |
| PF-P250CC-C070-S-xx | 90 ~ 305 Vac | 250 W | 214~357Vdc | 700mA | 93% | CCC CB ENEC CE RoHS |
| PF-P250CC-C070-U-xx | 90 ~ 305 Vac | 250 W | 214~357Vdc | 700mA | 93% | UL FCC CE RoHS |
| PF-P250CC-C105-S-xx | 90 ~ 305 Vac | 250 W | 143~238Vdc | 1050mA | 93% | CCC CB ENEC CE RoHS |
| PF-P250CC-C105-U-xx | 90 ~ 305 Vac | 250 W | 143~238Vdc | 1050mA | 93% | UL FCC CE RoHS |
| PF-P250CC-C140-S-xx | 90 ~ 305 Vac | 250 W | 107~179Vdc | 1400mA | 93% | CCC CB ENEC CE RoHS |
| PF-P250CC-C140-U-xx | 90 ~ 305 Vac | 250 W | 107~179Vdc | 1400mA | 93% | UL FCC CE RoHS |
| PF-P250CC-C210-S-xx | 90 ~ 305 Vac | 250 W | 71~119Vdc | 2100mA | 92% | CCC CB ENEC CE RoHS |
| PF-P250CC-C210-U-xx | 90 ~ 305 Vac | 250 W | 71~119Vdc | 2100mA | 92% | UL FCC CE RoHS |
| PF-P250CC-C280-S-xx | 90 ~ 305 Vac | 250 W | 54~89Vdc | 2800mA | 92% | CCC CB ENEC CE RoHS |

| | | | | | | |
|---------------------|--------------|-------|----------|--------|-----|------------------------|
| PF-P250CC-C280-U-xx | 90 ~ 305 Vac | 250 W | 54~89Vdc | 2800mA | 92% | UL FCC CE RoHS |
| PF-P250CC-C420-S-xx | 90 ~ 305 Vac | 250 W | 36~60Vdc | 4200mA | 92% | CCC CB ENEC CE RoHS |
| PF-P250CC-C420-U-xx | 90 ~ 305 Vac | 250 W | 36~60Vdc | 4200mA | 92% | UL FCC CE RoHS |

Note: xx = ND means non-dimming model; xx = DM means 0-10V dimmable; xx = TS means timer dimming;

■ Specifications

| Items | | Specifications |
|-------------------------|-------------------------------|---|
| Input | Input Voltage | 90~305Vac |
| | Input Frequency | 47~63Hz |
| | Power Factor | >0.99@ 120Vac& Full-Load; >0.96@ 220Vac& Full-Load |
| | THD | <20%@60-100%load, refer to THD vs. Load curve. |
| | Input Current | 1.8 Amax@110Vac & Full-Load; 0.9Amax@220Vac & Full-Load |
| | Inrush Current | 65A peak, 1.2ms duration@230Vac 25°C 70A peak, 1.3ms duration@277Vac 25°C <0.25A ² s@230Vac, 25°C Cold Start |
| | Leakage Current | 1mAmax @277Vac 60Hz, UL8750 0.75mAmax @240Vac 50Hz, IEC61347-1 |
| Output | Current Accuracy | ±5%Io |
| | Ripple Current ^[2] | Ip-p:5%Io |
| | Setup Time | 1.2s max |
| | Output Overshoot | 10%Io max & LED Load |
| Protection | Output Over Voltage | 135%Vmax, The unit will latch off when OVP. The product will deliver output power after unplugged the AC input and wait 10s and then plug in. |
| | Input Under Voltage | Shut Down When Vmains≤85±5Vac; Auto Recovery When Vmains≥90±5Vac |
| | Over Temperature | Lower the output current when Tc≥110±5°C; Auto Recovery When Tc≤70±5°C |
| | Short Circuit | Auto recovery. The output recovers when short is removed. |
| | Over Power | The output power can be limited if the load exceed rated output load. |
| Environmental Condition | Operating Temperature | -40°C~+70°C ; 10%RH~100%RH (See Derating Curve for more details) ^[3] |
| | Storage Temperature | -40°C~+85°C; 5%RH~100%RH |
| Others | MTBF | ≥280,000 hours, measured at 110 Vac input, 80% load and 25 °C ambient temperature(MIL-HDBK-217F) |
| | Lifetime | ≥50,000 hours, measured at 110 Vac input, 80% load and 75 °C Case temperature ^[4] |
| | Case Temperature | 90°Cmax ^[5] |
| | Dimensions | Inch (LxWxH) |
| | | Millimeter (LxWxH) |
| | Net Weight | 1100g |


Notes:

- [1] Unless specified, all the test results are measured in the 25DegC room temperature.
- [2] The result differs according to different LED load characteristic.
- [3] Please confirm working conditions according to the derating curve of output power vs. input voltage and temperature. Beyond the safety work condition will not be recommended.
- [4] refer to Lifetime vs. Tc curve .
- [5] Tc point is marked on the product label. The label is also listed in the specification for approval.

■ Safety & EMC Compliance


| Safety Category | Standard |
|-----------------|---|
| UL8750 | Light Emitting Diode(LED) Equipment for Use in Lighting Products |
| UL1012 | Power Unit Other Than Class 2 |
| IEC 61347-1 | Lamp Controlgear Part 1: General and Safety Requirements |
| IEC 61347-2-13 | Lamp Controlgear Part 2-13: Particular Requirement for d.c. or a.c. Supplied Electronic Controlgear for LED Modules |
| EMI Standards | Notes |
| IEC 55015 | Conducted emission test & Radiated emission test |
| IEC 61000-3-2 | Harmonic current emissions; Class C ($\geq 75\%$ load) |
| IEC 61000-3-3 | Voltage fluctuations & flicker |
| FCC Part 15 | Class B |
| EMS Standards | Notes |
| IEC 61000-4-2 | Electrostatic discharge (ESD) |
| IEC 61000-4-3 | Radio frequency electromagnetic field susceptibility test (RS) |
| IEC 61000-4-4 | Electrical fast transient (EFT) |
| IEC 61000-4-5 | Surge immunity test L-N:4kV; LN-PE:6kV |
| IEC 61000-4-6 | Conducted radio frequency disturbances test (CS) |
| IEC 61000-4-8 | Power frequency magnetic field test |
| IEC 61000-4-11 | Voltage dips |
| IEC 61547 | Electromagnetic immunity requirements applies to lighting equipment |

■ Derating Curve (Typical)

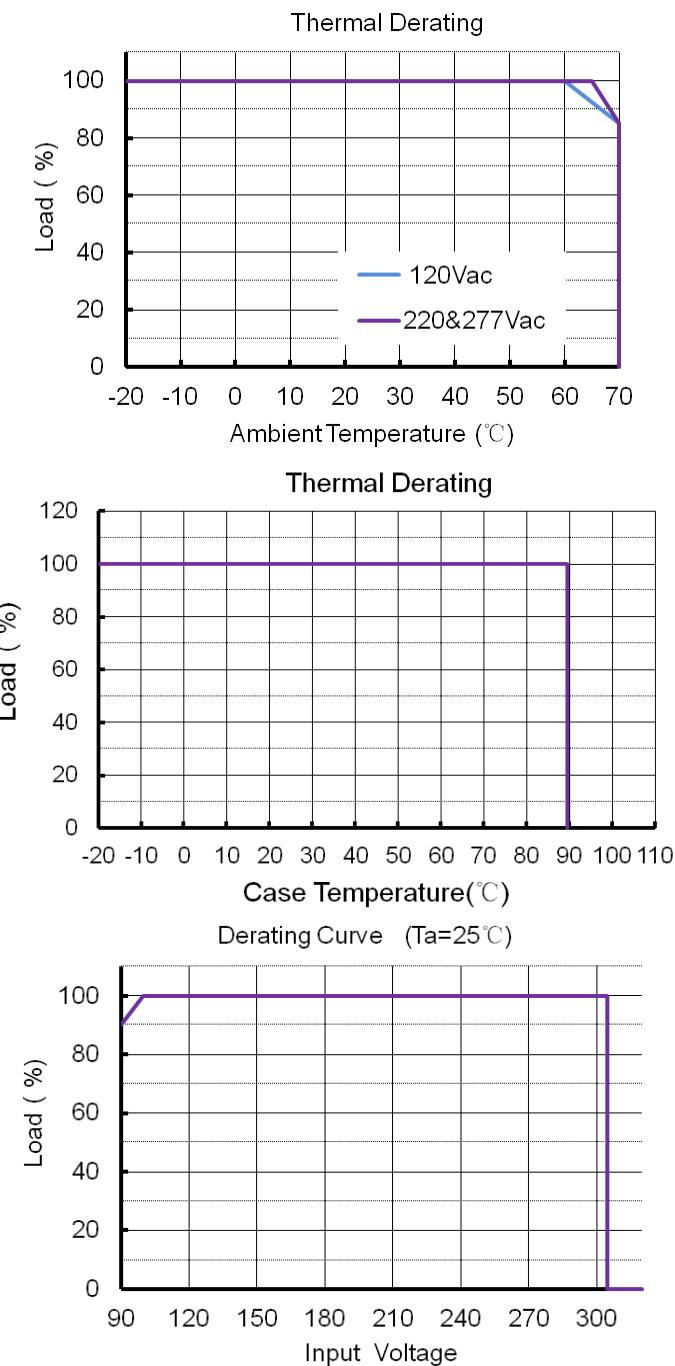


■ Efficiency vs. Load (Typical)


PF-P250CC-C053

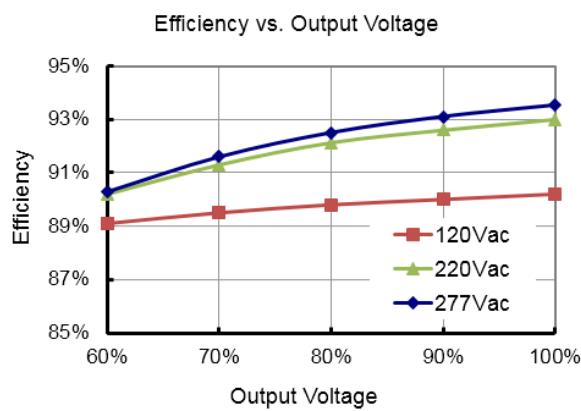


PF-P250CC-C070

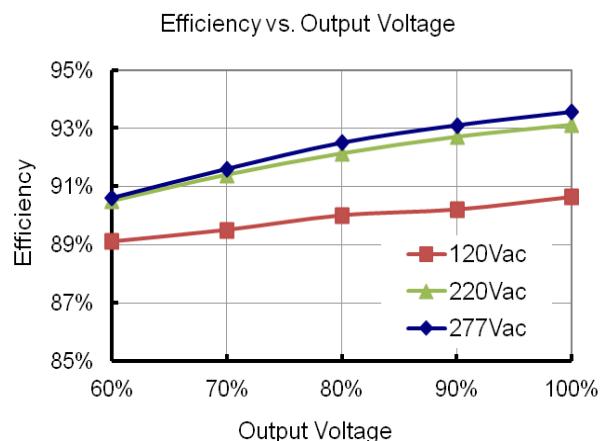


PF-P250CC-C105

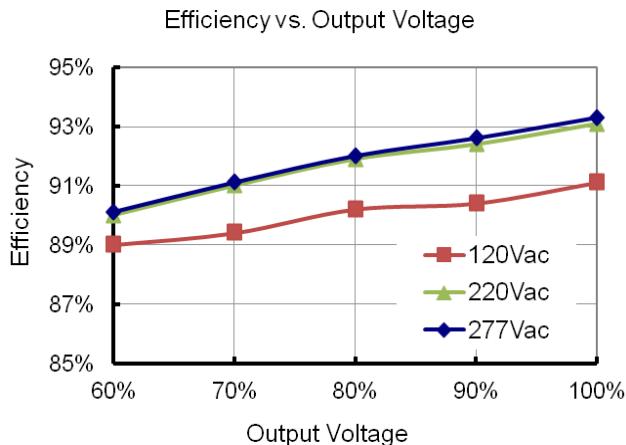


PF-P250CC-C140



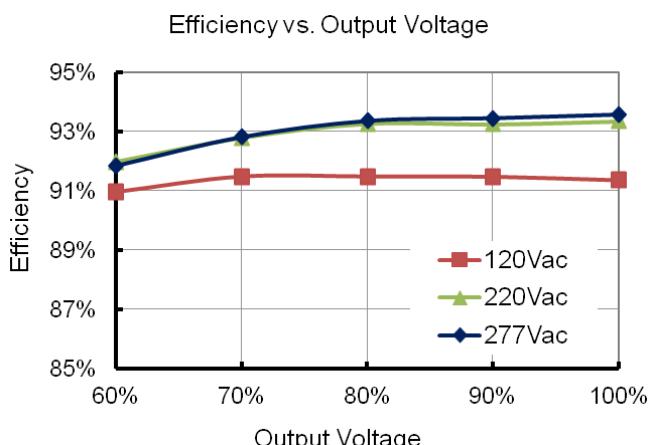


PF-P250CC-C210

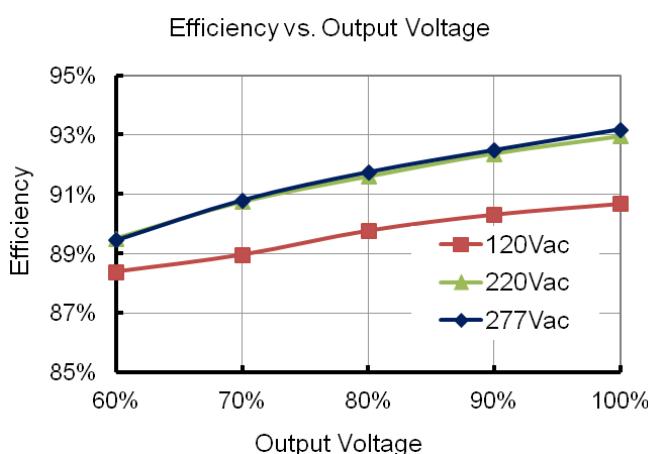


PF-P250CC-C280

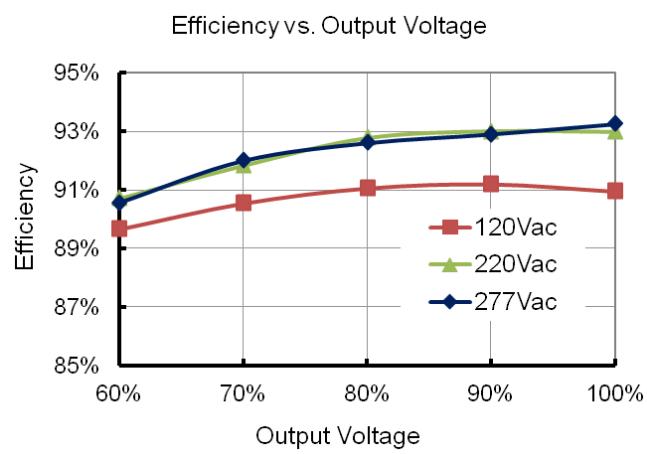


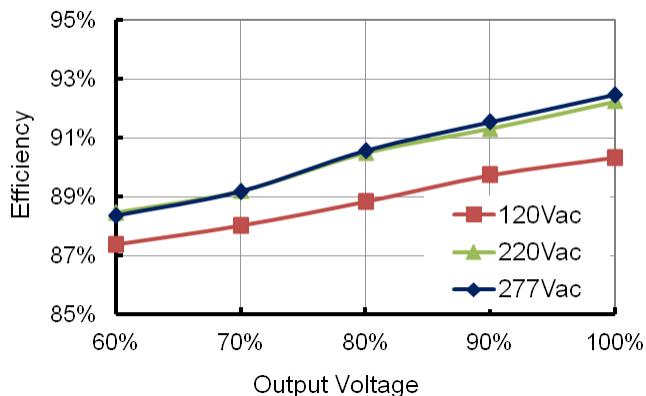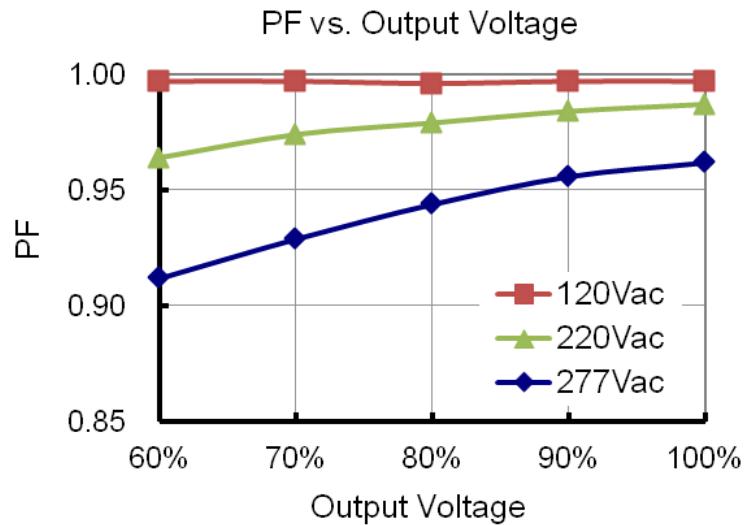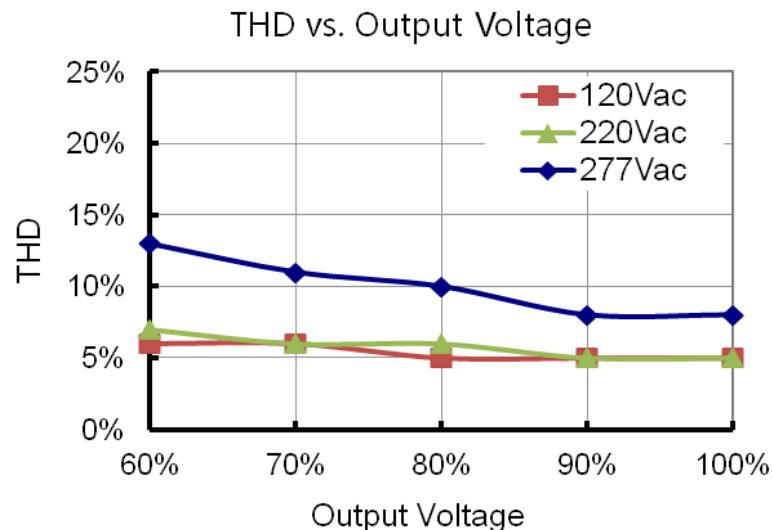PF-P250CC-C420
Efficiency vs. Output Voltage

■ Power Factor Characteristics (Typical)

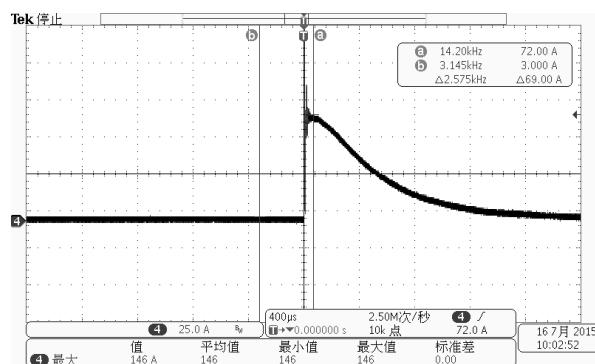■ THD vs. Load (Typical)


■ Inrush Current Waveform (Typical)

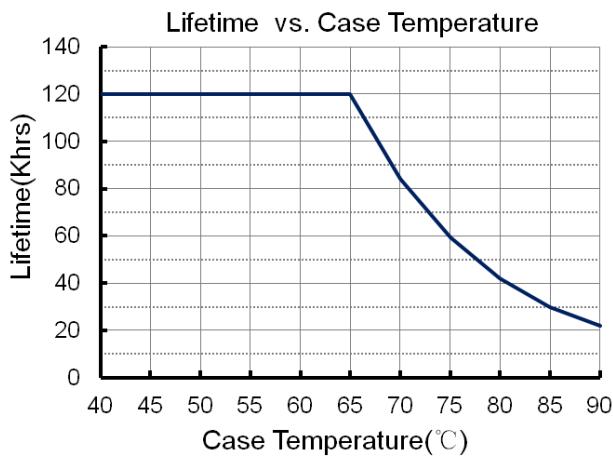

■ Lifetime vs. Case Temperature




■ Dimming Section

| Parameter | Min. | Typ. | Max. |
|---|------------------|----------|----------------------|
| Vcc Output Voltage | - | 12 V | - |
| 12V Auxiliary Output Source Current | | 200 mA | 300mA |
| Rin | - | 100 kOhm | - |
| Absolute maximum voltage range on the 0~10V input pin | -20 V | - | 20 V |
| Dimming range | 10% | - | 100% |
| Dim off threshold | | 0.5V | |
| Dim off hysteresis | | 0.2V | |
| 0-10V Dimming Range | 10% (Vdim=1V) | - | 100% (Vdim=8~10V) |


| | | | |
|--|-------------------|---|------------------------|
| PWM Dimming Range | 10% (Duty=10%) | - | 100% (Duty=80-100%) |
| PWM High | 3V | - | 10V |
| PWM Low | 0V | - | 0.6V |
| PWM Frequency | 300Hz | - | 2kHz |
| External PWM Controller Current Sinking Capability | 300uA | - | - |

Diagram

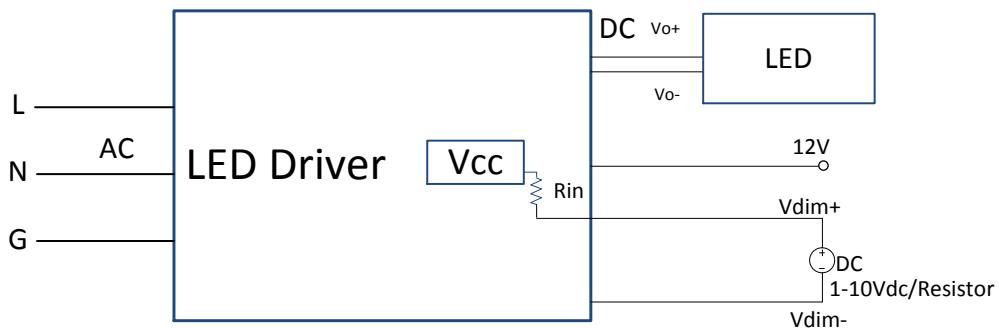

Dimming Curve

Output Current vs.Dimming Voltage

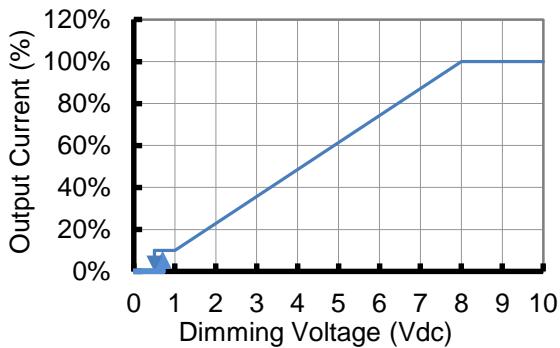


Output Current vs.PWM Duty Cycle




■ Mechanical Outline (Unit: mm)

PF-P250CC-Cxxx-S- ND/TS

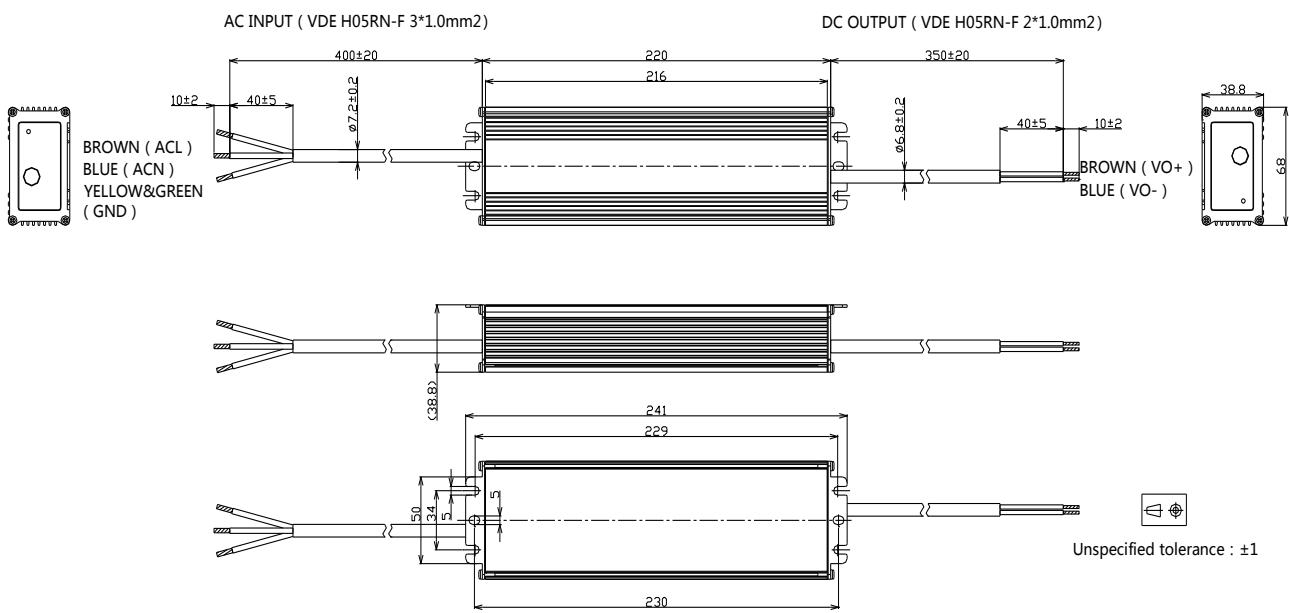


PF-P250CC-Cxxx-S- DM

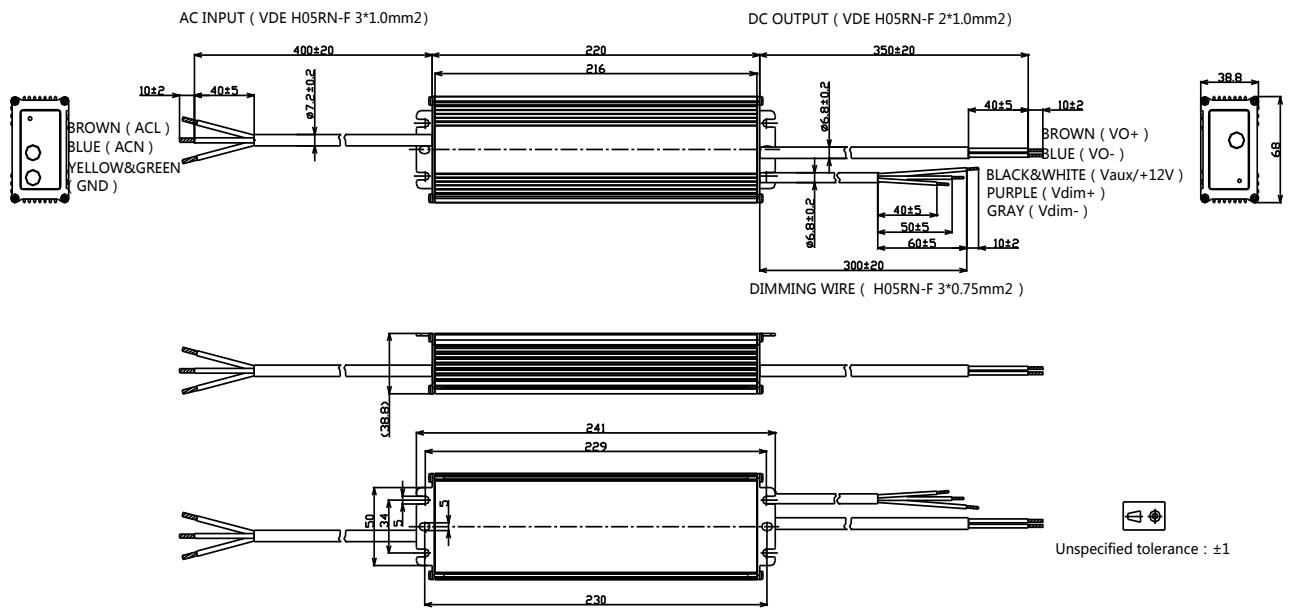

PF-P250CC-Cxxx-U- ND/TS

AC INPUT (UL SJTW 3*18AWG)


DC OUTPUT (UL SJTW 2*18AWG)

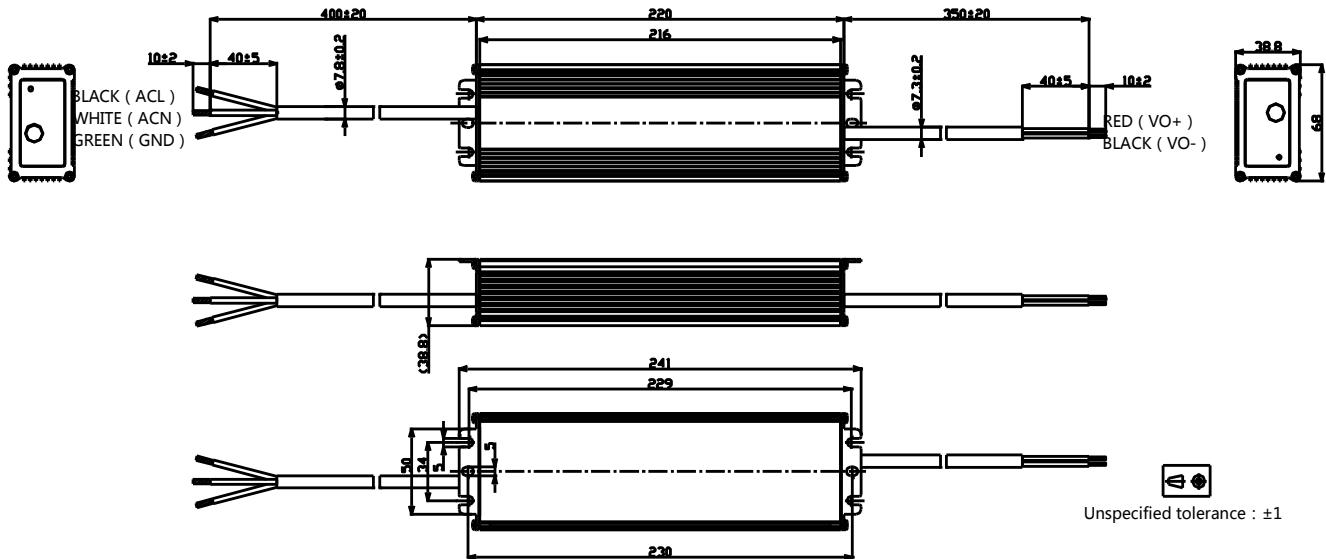

PF-P250CC-Cxxx-U- DM

AC INPUT (UL SJTW 3*18AWG)

DC OUTPUT (UL SJTW 2*18AWG)

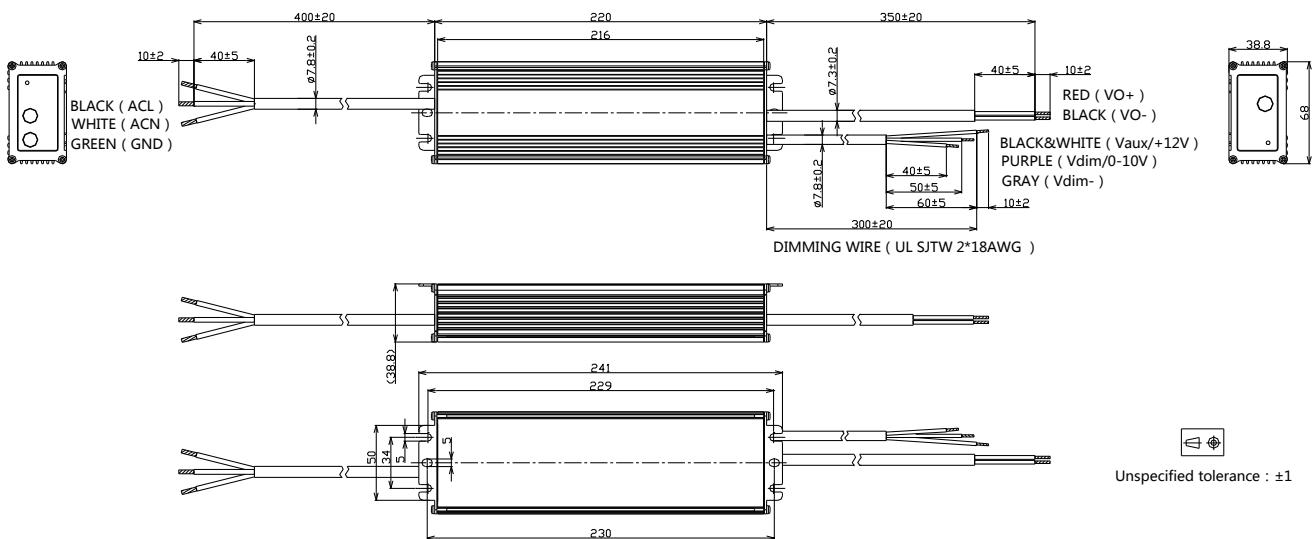

Note: Please make sure the output cable does not connect to dimming cable or the cables of other drivers until 20 seconds after being tested because of the remained voltage in the output capacitor.

■ Revision History

| Date | Rev. | Description of Change | | |
|------------|------|--------------------------|------|----|
| | | Item | From | To |
| 2015-02-04 | A | Release | / | / |
| 2016-2-11 | B | Update Performance Curve | | |