

## ■ Description

- √ Wide Input Voltage:90~305Vac
- √ 0-10V/PWM/Resistor/Time 4 in 1 Dimmable
- √ APFC (Active Power Factor Correction): 0.99 Typical
- √ All-Around Protection: OVP/OTP/SHORT
- √ Programmable Output Current and Timing Dimming
- √ Lighting Protection up to 6kV
- √ Waterproof: IP67
- √ 100% Full Load Aging Test for 4 Hours @Ta=45°C
- √ Safety Design Compliant to UL8750/IEC61347
- √ Thermal Optimized Aluminum Case with Potting




## ■ Application

Outdoor Applications: Street Light, Tunnel Light, Landscape Light, Garden Light and others

## ■ Model Selection

Model Number	Input Voltage Range	Output Power	Output Voltage Range	Full Power Output Current	Typical Eff.	Certification
PE-P075CC-C050-S-CS	90 ~ 305Vac	75W	90 - 214Vdc	350-500mA	91.0%	CCC ENEC CB CE RoHS
PE-P075CC-C050-U-CS	90 ~ 305Vac	75W	90 - 214Vdc	350-500mA	91.0%	UL SAA CE RoHS
PE-P075CC-C070-S-CS	90 ~ 305Vac	75W	64-150Vdc	500-700mA	90.0%	CCC ENEC CB CE RoHS
PE-P075CC-C070-U-CS	90 ~ 305Vac	75W	64-150Vdc	500-700mA	90.0%	UL SAA CE RoHS
PE-P075CC-C105-S-CS	90 ~ 305Vac	75W	43-107Vdc	700-1050mA	90.0%	CCC ENEC CB CE RoHS
PE-P075CC-C105-U-CS	90 ~ 305Vac	75W	43-107Vdc	700-1050mA	90.0%	UL SAA CE RoHS
PE-P075CC-C140-S-CS	90 ~ 305Vac	75W	32-71Vdc	1050-1400mA	89.0%	CCC ENEC CB CE RoHS
PE-P075CC-C140-U-CS	90 ~ 305Vac	75W	32-71Vdc	1050-1400mA	89.0%	UL SAA CE RoHS
PE-P075CC-C210-S-CS	90 ~ 305Vac	75W	21-54Vdc	1400-2100mA	88.0%	CCC ENEC CB CE RoHS
PE-P075CC-C210-U-CS	90 ~ 305Vac	75W	21-54Vdc	1400-2100mA	88.0%	UL SAA CE RoHS
PE-P075CC-C280-S-CS	90 ~ 305Vac	75W	16-36Vdc	2100-2800mA	88.0%	CCC ENEC CB CE RoHS
PE-P075CC-C280-U-CS	90 ~ 305Vac	75W	16-36Vdc	2100-2800mA	88.0%	UL SAA CE RoHS

## ■ Programmable Operation Area

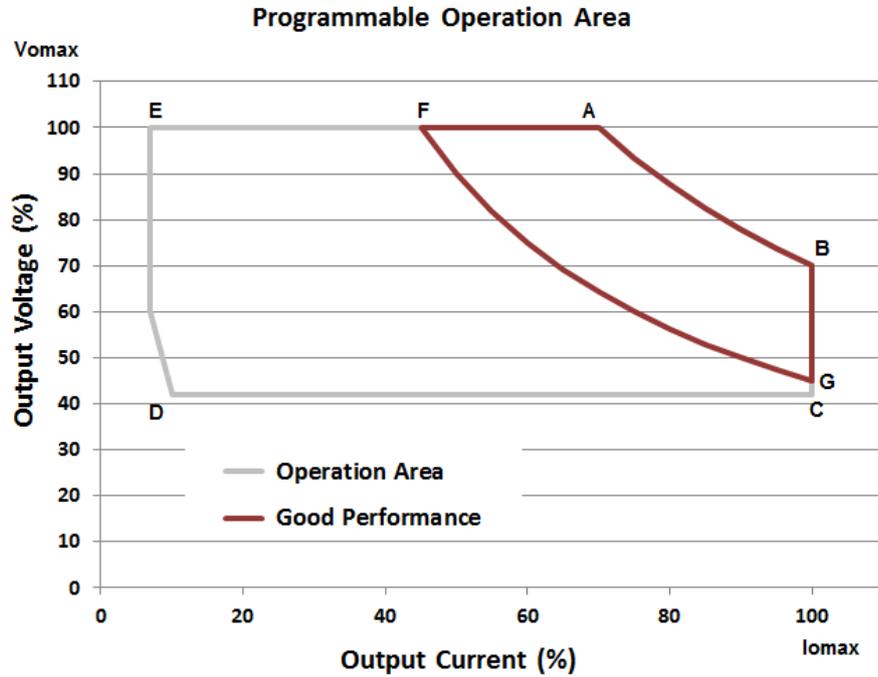

Here points of ABCDE form the operation area, while ABGF form the good performance area

Model	C050		C070		C105		C140		C210		C280	
Item	Io(mA)	Vo (V)										
A	350	214	500	150	700	107	1050	71	1400	54	2100	36
B	500	150	700	107	1050	71	1400	54	2100	36	2800	27
C	500	90	700	64	1050	43	1400	32	2100	21	2800	16
D	50	90	70	64	105	43	140	32	210	21	280	16
E	35	214	50	150	70	107	105	71	140	54	210	36
F	210	214	300	150	420	107	630	71	840	54	1260	36
G	500	90	700	64	1050	43	1400	32	2100	21	2800	16

## ■ Specifications

Items		Specification		
Input	Input Voltage	90~305Vac		
	Input Frequency	47~63Hz		
	Power Factor	>0.9@60-100%load, refer to PF vs. Load curve.		
	THD	<20%@60-100%load, refer to THD vs. Load curve.		
	Input Current	0.95Amax@110Vac & Full-Load; 0.5Amax@230Vac & Full-Load		
	Inrush Current	65A peak, 1.2ms duration@230Vac 25°C 80A peak, 1.3ms duration@277Vac 25°C <5.0A <sup>2</sup> s@230Vac, 25°C Cold Start		
	Leakage Current	1mAmax @277Vac 60Hz, UL8750 0.75mAmax @240Vac 50Hz, IEC61347-1		
Output	Rated Power	75W		
	Current Accuracy	±5%Io		
	Ripple Current <sup>[2]</sup>	Ip-p: 5%LED 60%-100% Load		
	Setup Time	1.2s max		
	Output Overshoot	10%Io		
Protection	Output Over Voltage	135%Vomax, The unit will latch off when OVP. The product will deliver output power after unplugged the AC input and wait 10s and then plug in.		
	Over Temperature	Decrease output current until over temperature state is removed		
	Short Circuit	Auto recovery. The output recovers when short is removed.		
	Over Power	The output power can be limited if the load exceed rated output load.		
Environmental Condition	Operating Temperature	-40°C~+70°C; 10%RH~100%RH (See Derating Curve for more details) <sup>[3]</sup>		
	Storage Temperature	-40°C~+85°C; 5%RH~100%RH		
Others	MTBF	≥320,000 hours, measured at 230Vac input, 80% load and 25°C ambient temperature(MIL-HDBK-217F)		
	Lifetime	≥58,000 hours, measured at 230Vac input, 80% load and Tcase=75°C <sup>[4]</sup>		
	Case Temperature	90°C max <sup>[5]</sup>		
	Dimensions	Inch(L x W x H)	6.77x2.66x1.48	
		Millimeter(L x W x H)	172.0x67.5x37.5	
Net Weight	720g			

Notes:

[1] Unless specified, all the test results are measured in the 25DegC room temperature.

[2] The result differs according to different LED load characteristic.

[3] Please confirm working conditions according to the derating curve of output power vs. input voltage and temperature. Beyond the safety work condition will not be recommended.




[4] refer to Lifetime vs. Tc curve .

[5] Tc point is marked on the product label. The label is also listed in the specification for approval.

## ■ Safety & EMC Compliance


<b>Safety Category</b>	<b>Standard</b>
UL8750	Light Emitting Diode(LED) Equipment for Use in Lighting Products
UL1012	Power Unit Other Than Class 2
<b>Safety Category</b>	<b>Standard</b>
UL1310	Class 2 Power Units
IEC 61347-1	Lamp Control gear Part 1: General and Safety Requirements
IEC 61347-2-13	Lamp Control gear Part 2-13: Particular Requirement for d.c. or a.c. Supplied Electronic Control gear for LED Modules
<b>EMI Standards</b>	<b>Notes</b>
IEC55015	Conducted emission test & Radiated emission test
IEC61000-3-2	Harmonic current emissions; Class C ( $\geq 75\%$ load)
IEC61000-3-3	Voltage fluctuations & flicker
FCC Part 15	Class B
<b>EMS Standards</b>	<b>Notes</b>
IEC 61000-4-2	Electrostatic discharge (ESD)
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test L-N: 4kV; LN-PE: 6kV
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment

## ■ Derating Curve (Typical)

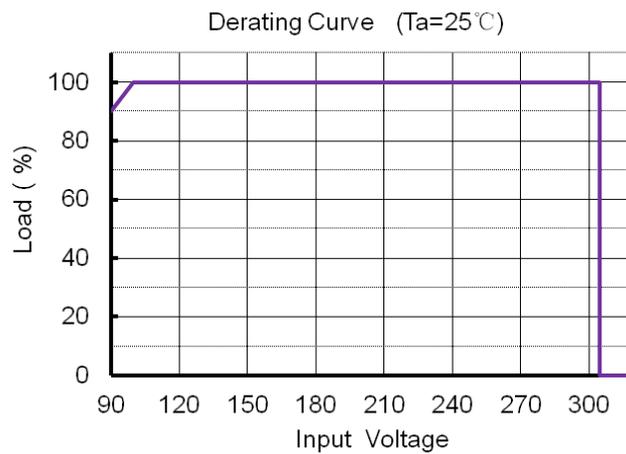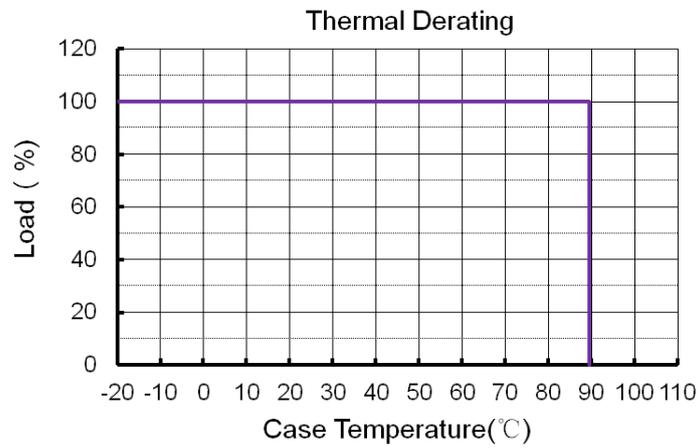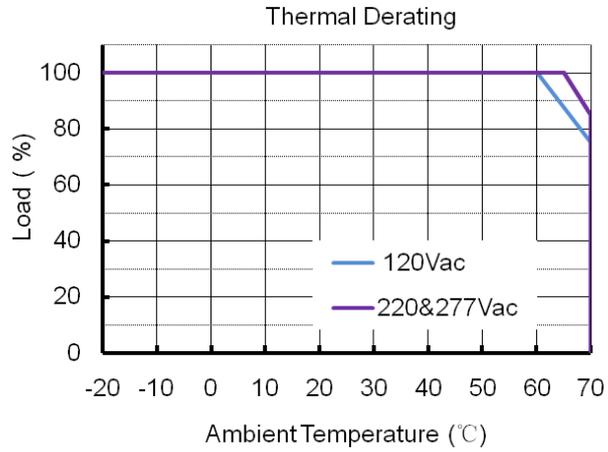


**■ Efficiency vs. Load (Typical)**
**PE-P075CC-C050**


Efficiency vs. Output Voltage

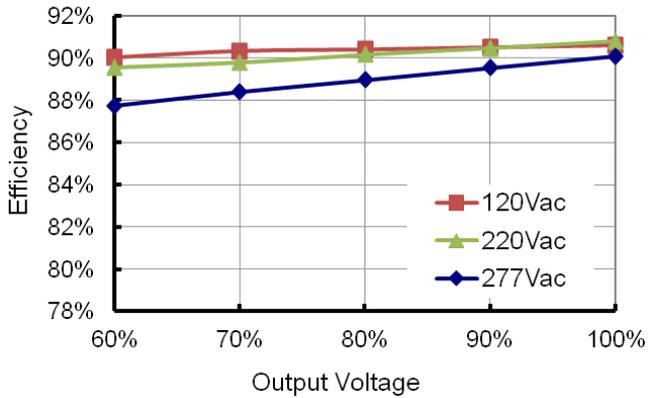
**PE-P075CC-C070**


Efficiency vs. Output Voltage

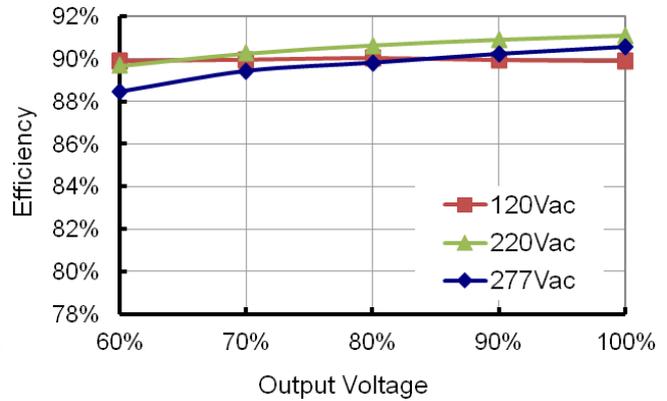
**PE-P075CC-C105**


Efficiency vs. Output Voltage

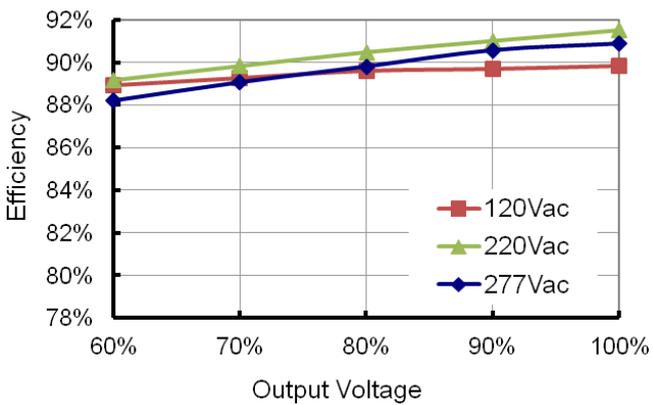
**PE-P075CC-C140**


Efficiency vs. Output Voltage

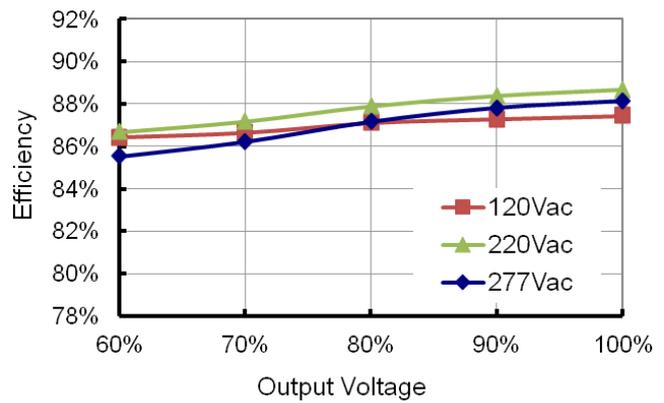
**PE-P075CC-C210**


Efficiency vs. Output Voltage

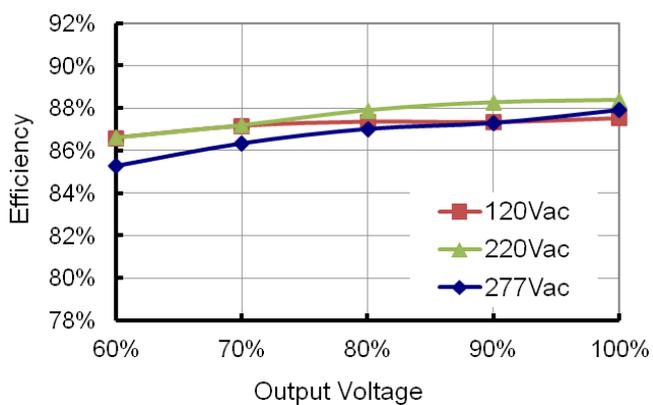
**PE-P075CC-C280**


Efficiency vs. Output Voltage

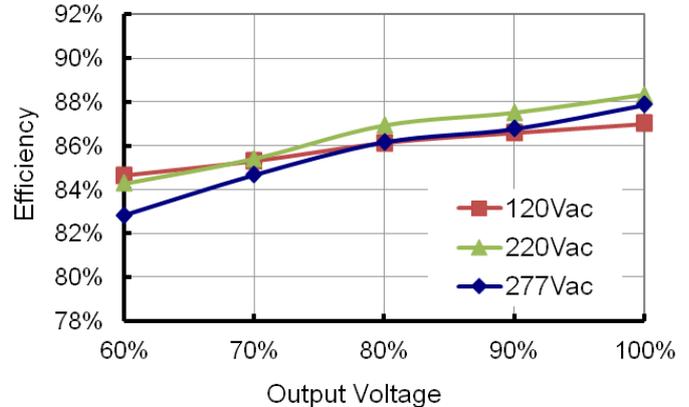


### ■ Power Factor Characteristics (Typical)

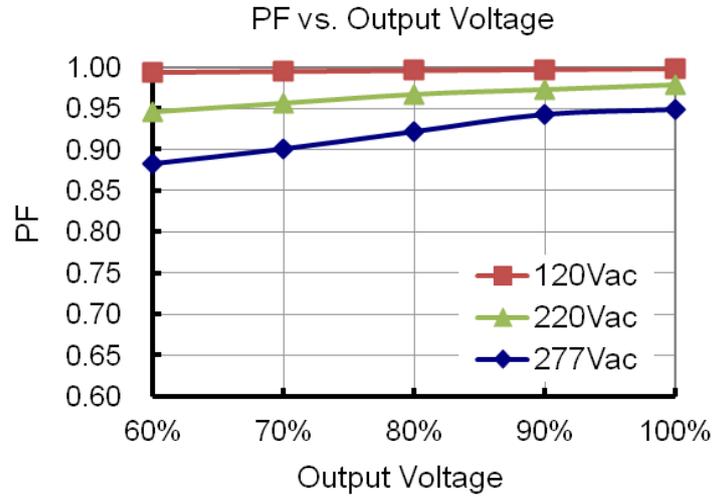


### ■ THD vs. Load (Typical)

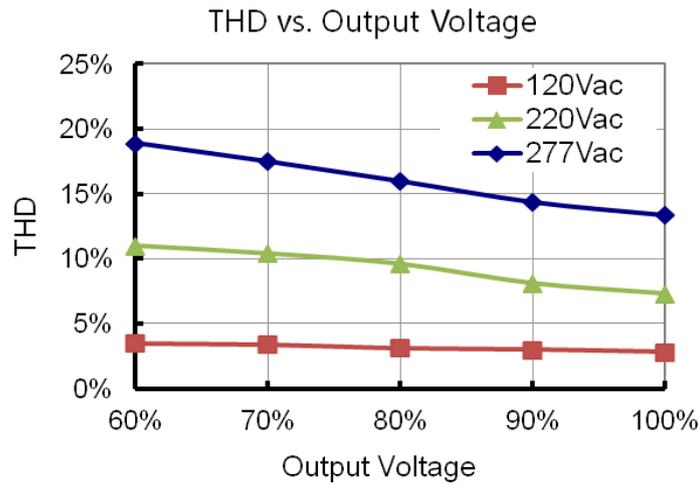

### ■ Inrush Current Waveform (Typical)

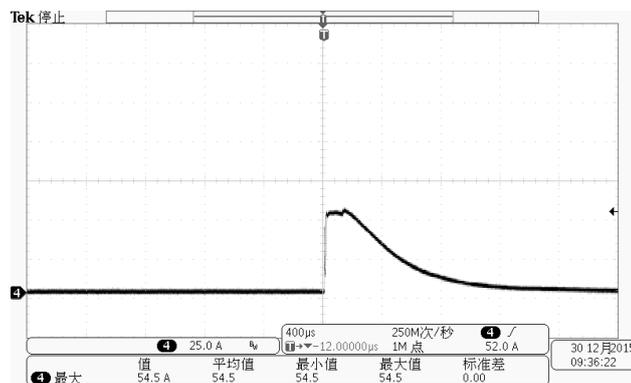


## ■ Lifetime vs. Case Temperature

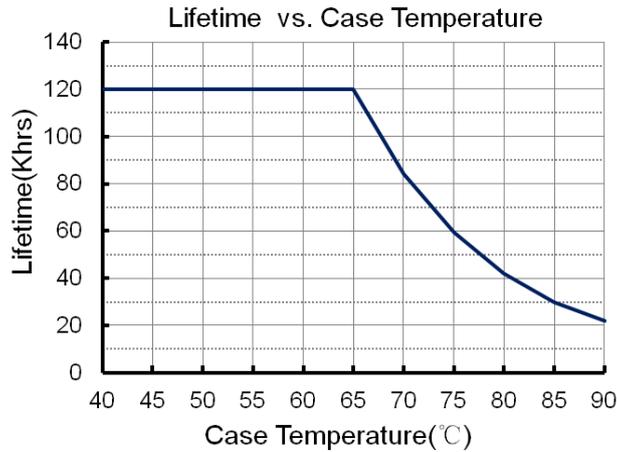



## ■ Dimming Section

Parameter	Min.	Typ.	Max.	Notes
Vcc	-	12.5 V	-	
Pull-up Resistance (Rin)	-	50 kOhm	-	
Absolute Maximum Voltage on the 0~10V/PWM input pin	-20 V	-	20 V	
0-10V Dimming Range	10% (Vdim=0~1V)	-	100% (Vdim=8~10V)	
PWM Dimming Range	10% (Duty=0-10%)	-	100% (Duty=90-100%)	
PWM High	3V	-	10V	
PWM Low	0V	-	0.6V	
PWM Frequency	300Hz	-	2kHz	
External PWM Controller Current Sinking Capability	300uA	-	-	

## Diagram

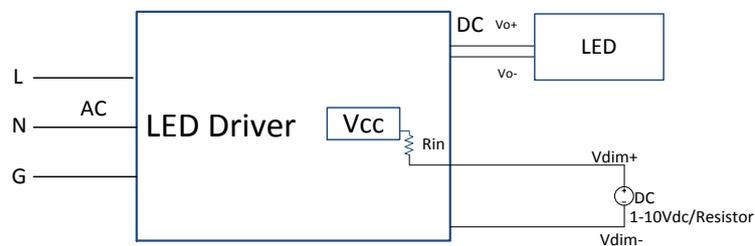


### Dimming Curve

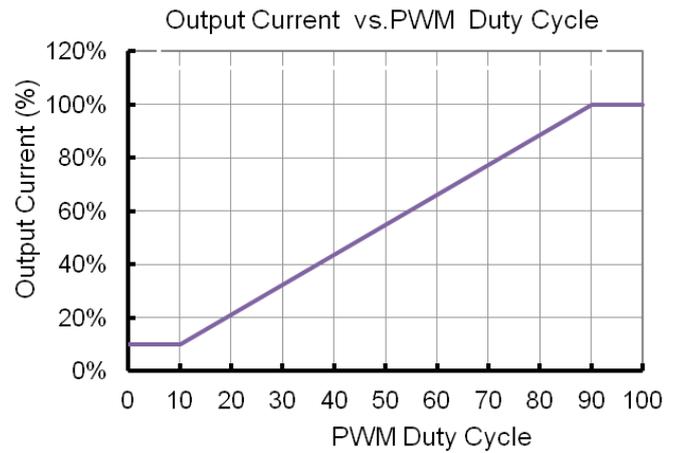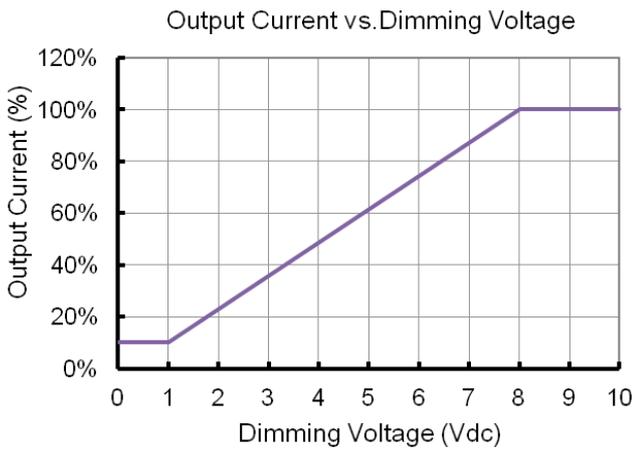

### ■ Mechanical Outline (Unit: mm)

PE-P075CC-Cxxx-S-CS

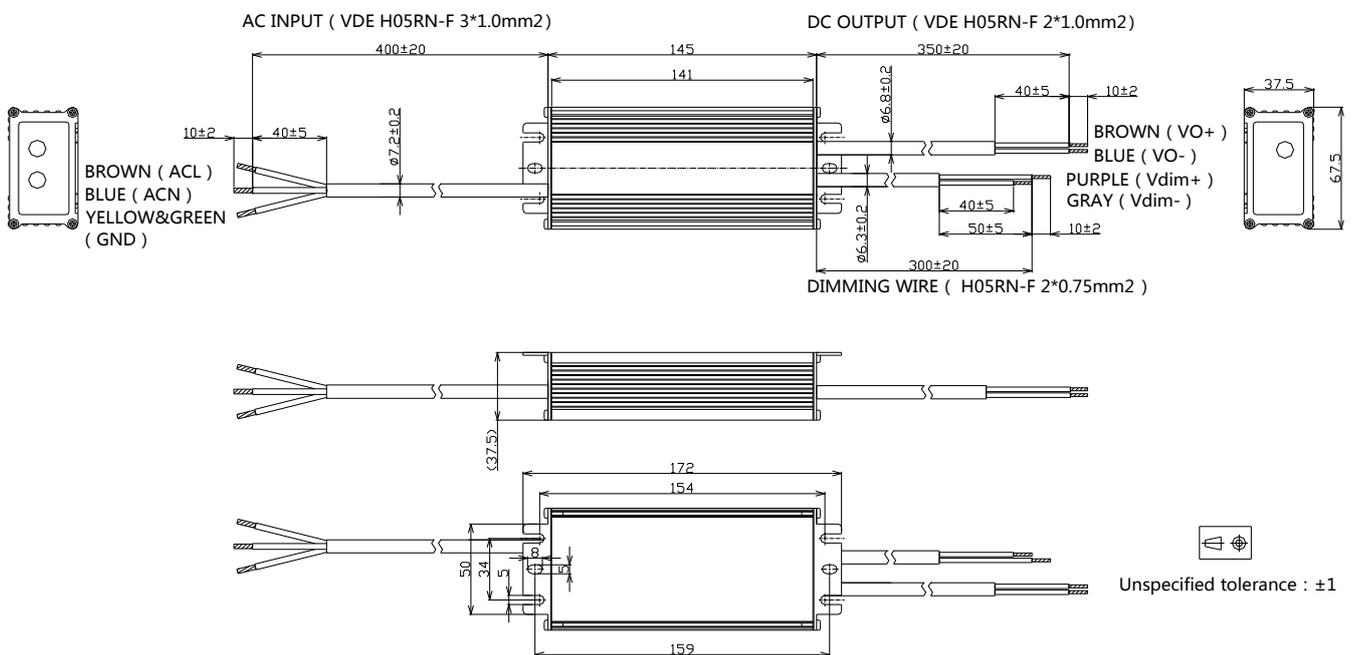

Note: Please make sure the output cable does not connect to dimming cable or the cables of other drivers until 20 seconds after being tested because of the remained voltage in the output capacitor.

