

■ Description

- √ Wide Input Voltage: 90~305Vac
- √ High Efficiency up to 93.0%
- √ APFC (Active Power Factor Correction): 0.99 Typical
- √ All-Around Protection: OVP/OTP/SHORT
- √ 0-10V/PWM/Resistor/Time 4 in 1 Dimmable
- √ Programmable Output Current with Constant Wattage Design
- √ Lightning Protection 6kV
- √ Waterproof: IP67
- √ 100% Full Load Aging Test for 4 Hours @Ta=45℃
- √ Safety Design Compliant to UL8750/IEC61347
- √ Thermal Optimized Aluminum Case with Potting




■ Application

Outdoor Applications: Street Light and High Bay

■ Model Selection

Model Number	Input Voltage Range	Output Power	Output Voltage Range	Full Power Output Current	Typical Eff.	Certification (ongoing)
PF-F300CC-C095-S-CS	176 ~ 305 Vac	300 W	189-462Vdc	650 - 950mA	92.5%	CCC CE RoHS
PF-F300CC-C155-S-CS	176 ~ 305 Vac	300 W	116-400Vdc	1000 - 1550mA	92.5%	CCC CE RoHS
PF-P300CC-C250-S-CS	176 ~ 305 Vac	300 W	72-176Vdc	1700 - 2500mA	92.5%	CCC CE RoHS
PF-P300CC-C490-U-CS	176 ~ 305 Vac	300 W	37-86Vdc	3500 - 4900mA	92.5%	CCC CE RoHS

■ Programmable Operation Area

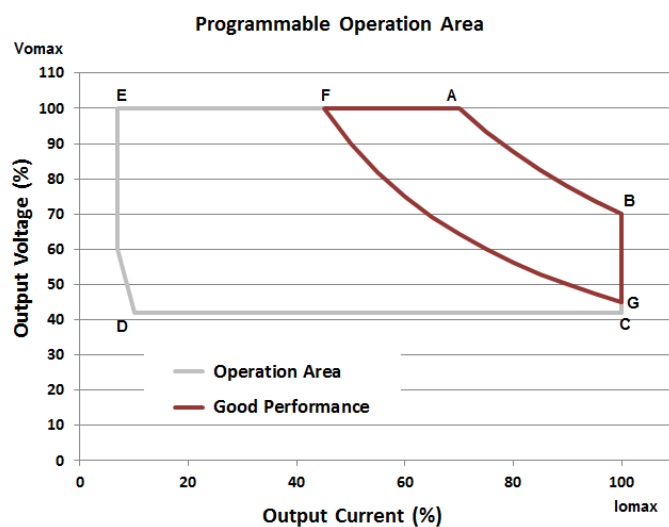

Model	C095		C155		C250		C490	
Item	Io(mA)	Vo (V)	Io(mA)	Vo (V)	Io(mA)	Vo (V)	Io(mA)	Vo (V)
A	650	462	1100	273	1700	176	3500	86
B	950	316	1550	194	2500	120	4900	61
C	950	189	1550	116	2500	72	4900	37
D	95	189	155	116	250	72	490	37
E	65	462	110	273	170	176	350	86
F	390	462	660	273	1020	176	2100	86
G	950	189	1550	116	2500	72	4900	37

Note: here the points of ABCDE form the operation area, and ABGF form the good performance area

■ Specifications

Items		Specifications	
Input	Input Voltage	176~305Vac	
	Input Frequency	47~63Hz	
	Power Factor	>0.9@70-100%load, refer to PF vs. Load curve.	
	THD	<20%@70-100%load, refer to THD vs. Load curve.	
	Input Current	2.8 Amax@110Vac & Full-Load; 1.4Amax@220Vac & Full-Load	
	Inrush Current	65A peak, 1.2ms duration@230Vac 25°C 70A peak, 1.3ms duration@277Vac 25°C <5.0A ² s@230Vac, 25°C Cold Start	
	Leakage Current	1mAmax @277Vac 60Hz, UL8750 0.75mAmax @250Vac 50Hz, IEC61347-1	
Output	Current Accuracy	±1%Io	
	Ripple Current ^[2]	Ip-p:5%Io	
	Setup Time	1.2s max	
	Output Overshoot	10%Io max & LED Load	
Protection	Output Over Voltage	135%Vomax, The unit will latch off when OVP. The product will deliver output power after unplugged the AC input and wait 10s and then plug in.	
	Input Under Voltage	Shut Down When Vmains≤85±5Vac; Auto Recovery When Vmains≥90±5Vac	
	Over Temperature	Lower the output current when Tc≥110±5°C; Auto Recovery When Tc≤70±5°C	
	Short Circuit	Auto recovery. The output recovers when short is removed.	
	Over Power	The output power can be limited if the load exceed rated output load.	
Environmental Condition	Operating Temperature	-40°C~+70°C ; 10%RH~100%RH (See Derating Curve for more details) ^[3]	
	Storage Temperature	-40°C~+85°C; 5%RH~100%RH	
Others	MTBF	≥280,000 hours, measured at 110 Vac input, 80% load and 25 °C ambient temperature(MIL-HDBK-217F)	
	Lifetime	≥50,000 hours, measured at 110 Vac input, 80% load and 75 °C Case temperature ^[4]	
	Case Temperature	90°Cmax ^[5]	
	Dimensions	Inch (LxWxH)	9.49*2.68*1.53
		Millimeter (LxWxH)	241*68*38.8
	Net Weight	1100g	

Notes:

[1] Unless specified, all the test results are measured in the 25DegC room temperature.

[2] The result differs according to different LED load characteristic.

[3] Please confirm working conditions according to the derating curve of output power vs. input voltage and temperature. Beyond the safety work condition will not be recommended.




[4] refer to Lifetime vs. Tc curve .

[5] Tc point is marked on the product label. The label is also listed in the specification for approval.

■ Safety & EMC Compliance

Safety Category	Standard
UL8750	Light Emitting Diode(LED) Equipment for Use in Lighting Products
UL1012	Power Unit Other Than Class 2
IEC 61347-1	Lamp Controlgear Part 1: General and Safety Requirements
IEC 61347-2-13	Lamp Controlgear Part 2-13: Particular Requirement for d.c. or a.c. Supplied Electronic Controlgear for LED Modules
EMI Standards	Notes
IEC 55015	Conducted emission test & Radiated emission test
IEC 61000-3-2	Harmonic current emissions; Class C ($\geq 75\%$ load)
IEC 61000-3-3	Voltage fluctuations & flicker
FCC Part 15	Class B
EMS Standards	Notes
IEC 61000-4-2	Electrostatic discharge (ESD)
IEC 61000-4-3	Radio frequency electromagnetic field susceptibility test (RS)
IEC 61000-4-4	Electrical fast transient (EFT)
IEC 61000-4-5	Surge immunity test L-N:4kV; LN-PE:6kV
IEC 61000-4-6	Conducted radio frequency disturbances test (CS)
IEC 61000-4-8	Power frequency magnetic field test
IEC 61000-4-11	Voltage dips
IEC 61547	Electromagnetic immunity requirements applies to lighting equipment


■ Derating Curve (Typical)

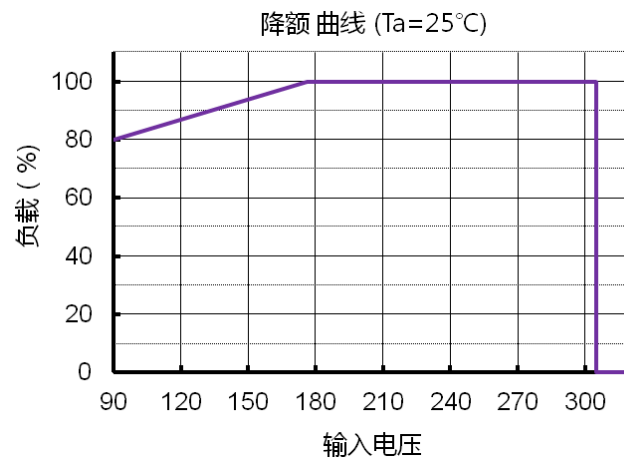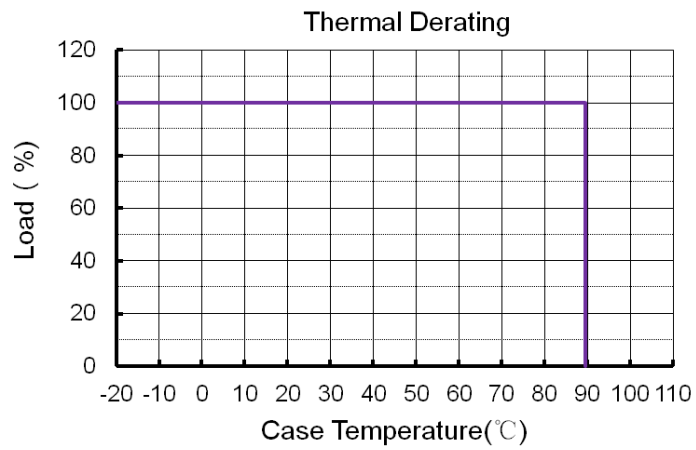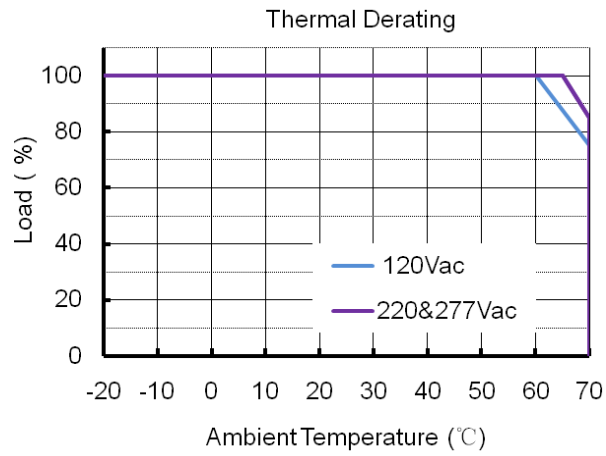

■ Efficiency vs. Load (Typical)


PF-F300CC-C095

Efficiency vs. Output Voltage

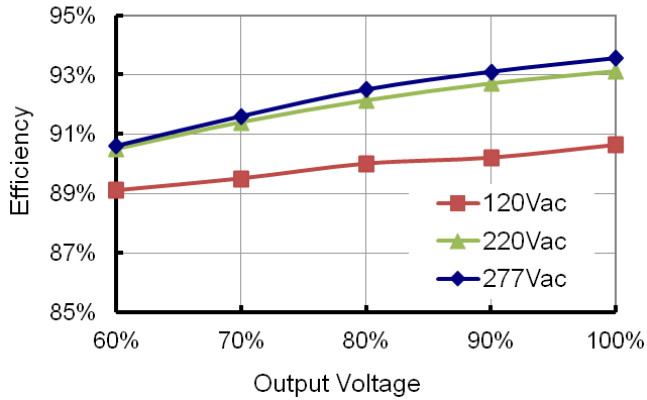


PF-F300CC-C155

Efficiency vs. Output Voltage

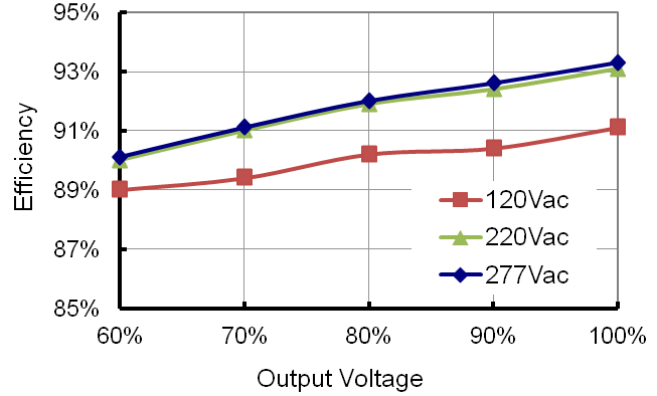


PF-F300CC-C250

Efficiency vs. Output Voltage

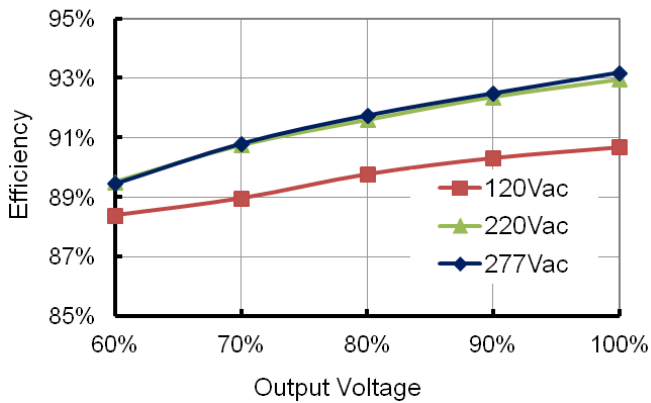


PF-F300CC-C490

Efficiency vs. Output Voltage

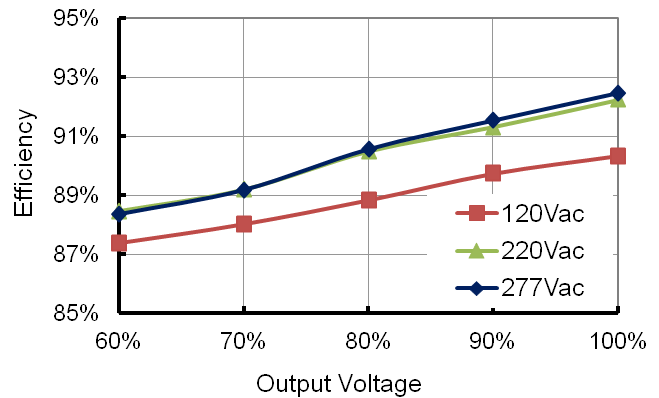


■ Power Factor Characteristics (Typical)


PF vs. Output Voltage

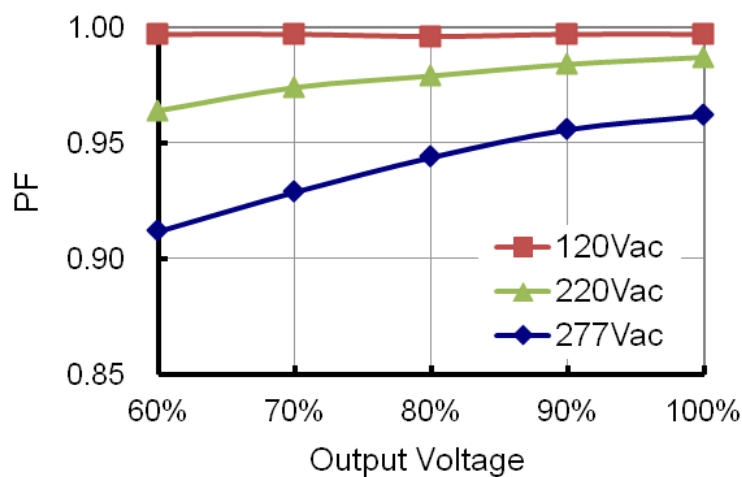


■ THD vs. Load (Typical)

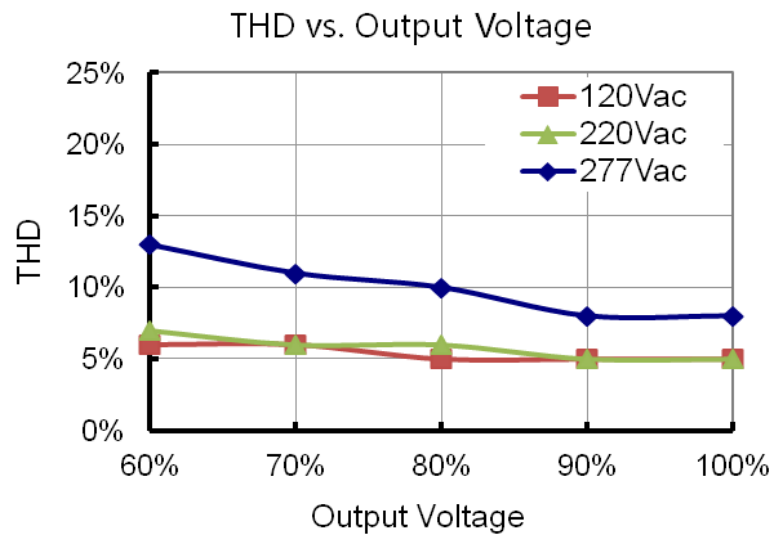

■ Inrush Current Waveform (Typical)

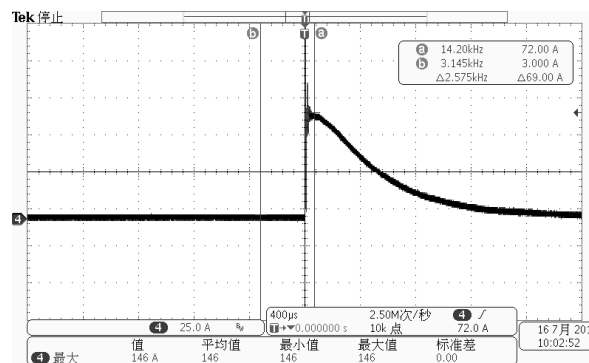


■ Lifetime vs. Case Temperature

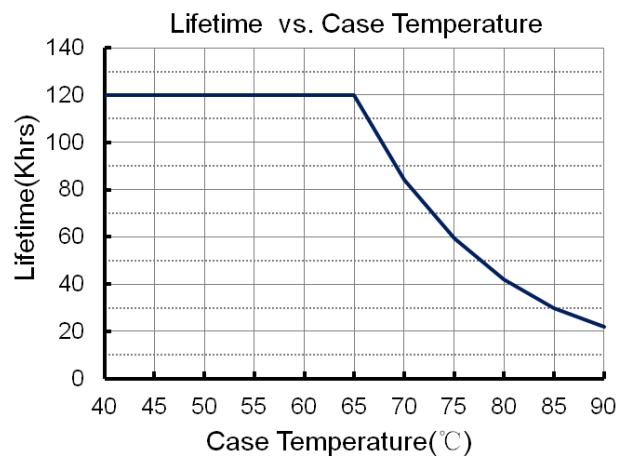



■ Dimming Section

Parameter	Min.	Typ.	Max.
Vcc	-	12 V	-
Rin	-	100 kOhm	-
Absolute maximum voltage range on the 0~10V input pin	-20 V	-	20 V
Dimming range	10%	-	100%
Dim off threshold		0.5V	
Dim off hysteresis		0.3V	
0-10V Dimming Range	10% (Vdim=1V)	-	100% (Vdim=8~10V)
PWM Dimming Range	10% (Duty=10%)	-	100% (Duty=90-100%)
PWM High	3V	-	10V
PWM Low	0V	-	0.6V
PWM Frequency	300Hz	-	2kHz
External PWM Controller Current Sinking Capability	300uA	-	-

Diagram

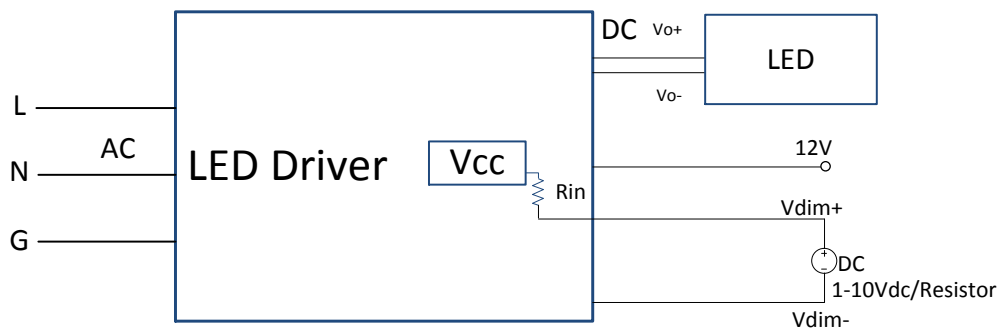


Dimming Curve

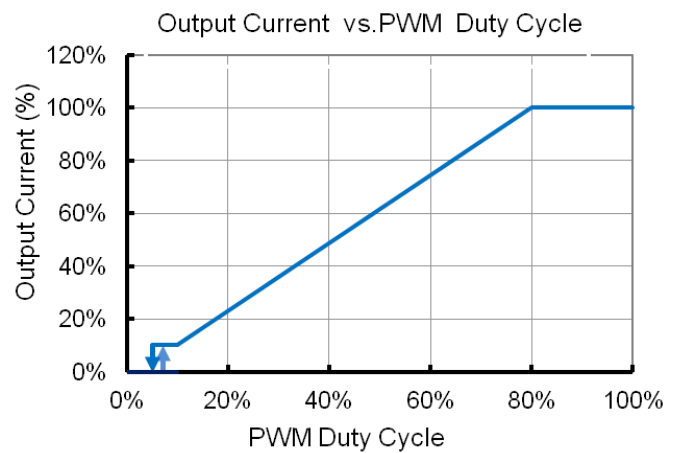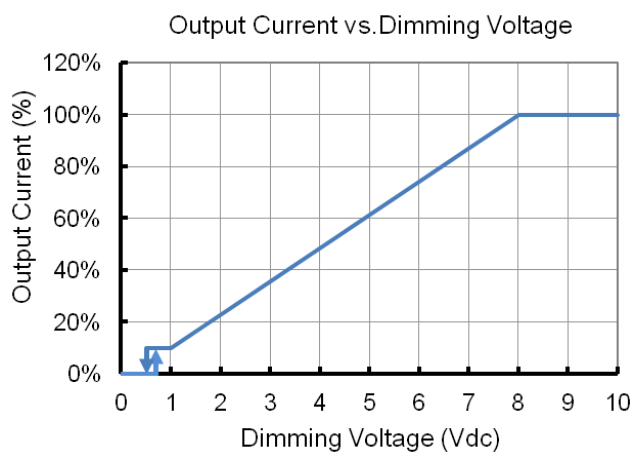


■ Mechanical Outline (Unit: mm)

PF-F300CC-Cxxx-S-CS

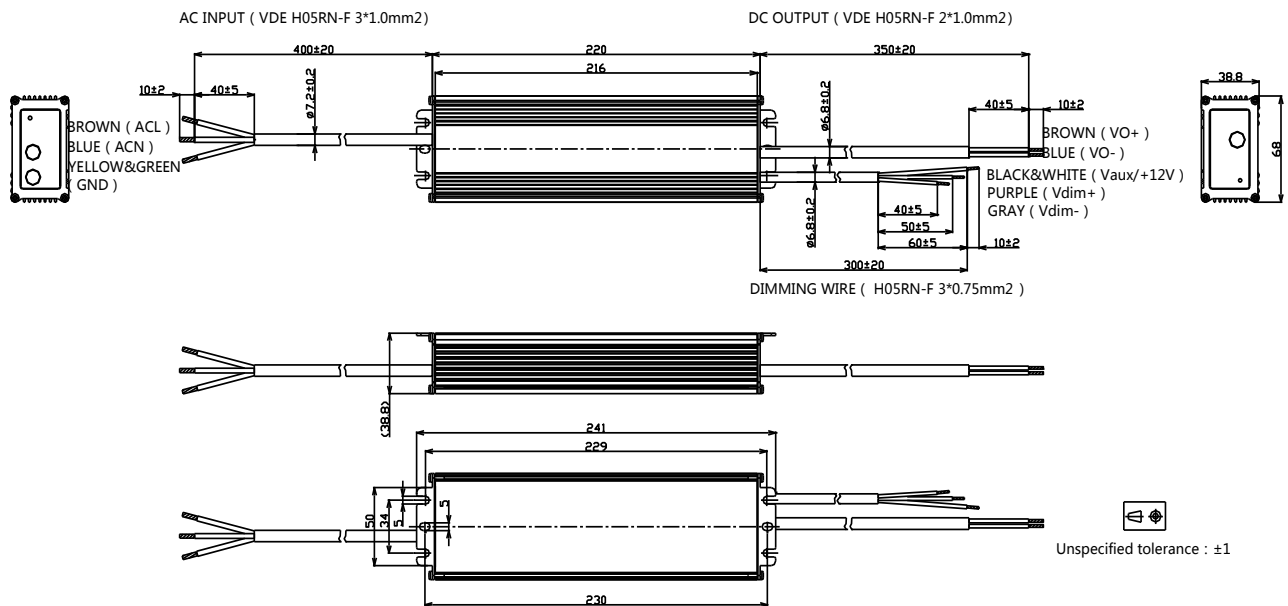

PF- F300CC-Cxxx-U-CS

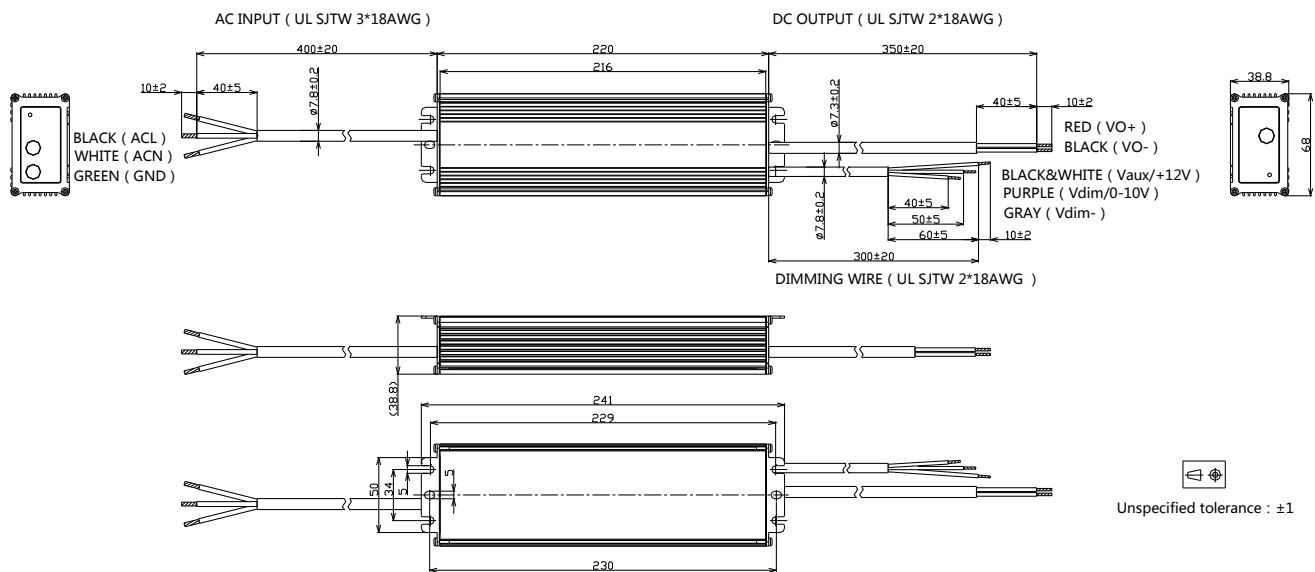

Note: Please make sure the output cable does not connect to dimming cable or the cables of other drivers until 20 seconds after being tested because of the remained voltage in the output capacitor.

■ Revision History

Date	Rev.	Description of Change		
		Item	From	To
2015-02-04	A	Release	/	/
2016-2-11	B	Update Performance Curve		